



Level



Pressure



Flow



Temperature



Liquid
Analysis



Registration



Systems
Components



Services



Solutions

Technical Information

CCS120

Sensor for total chlorine



Applications

- Drinking water conditioning
- Pool water conditioning
- Service water conditioning
- Waste water treatment

Your benefits

- Flow and immersion installation
- Works with the well known holder assemblies:
CCA250
CXA611
- Works with the transmitter CCM223/253
- Can retrofit into existing applications
- Sensor selection via menu of the transmitter CCM223/253
- Temperature sensor NTC 10K

Function and system design

Measuring principle

The amperometric sensor is based on the conversion of the measuring variable chlorine in an electrical current. Two electrodes covered by an electrolyte are in contact to the medium via a membrane. It has a platinum working electrode and a silver halogenide coated counter or reference electrode. The chlorine compounds contained in the medium diffuse through the membrane. The constant polarization voltage between the two electrodes instigates the electrochemical reaction of the chlorine compounds on the working electrode. The resulting current is measured as a primary signal (amperometric measurement principle). It is proportional to the chlorine concentration within the sensor's operating range and only slightly pH dependant for this type of sensor. The primary signal is converted by the amplifier electronics of the sensor into a 0 to 5 µA output signal which is displayed by the transmitter.


Function

The sensor CCS120 is a membrane-capped amperometric two electrode sensor. It is used for continuous measurement of total chlorine.
 Total chlorine consists of free chlorine (HOCl, OCl⁻) and bound chlorine (chloramines).
 To calibrate the measuring system, determine the content of chlorine using the DPD 4 method. To do so, you need a photometer with the pertaining reagents. The determined value is the calibration value for the transmitter.

Measuring system

A complete measuring system for flow measurement consists of:

- Chlorine sensor
- Transmitter Liquisys M CCM223/253
- Special measuring cable
- Flow electrode holder assembly

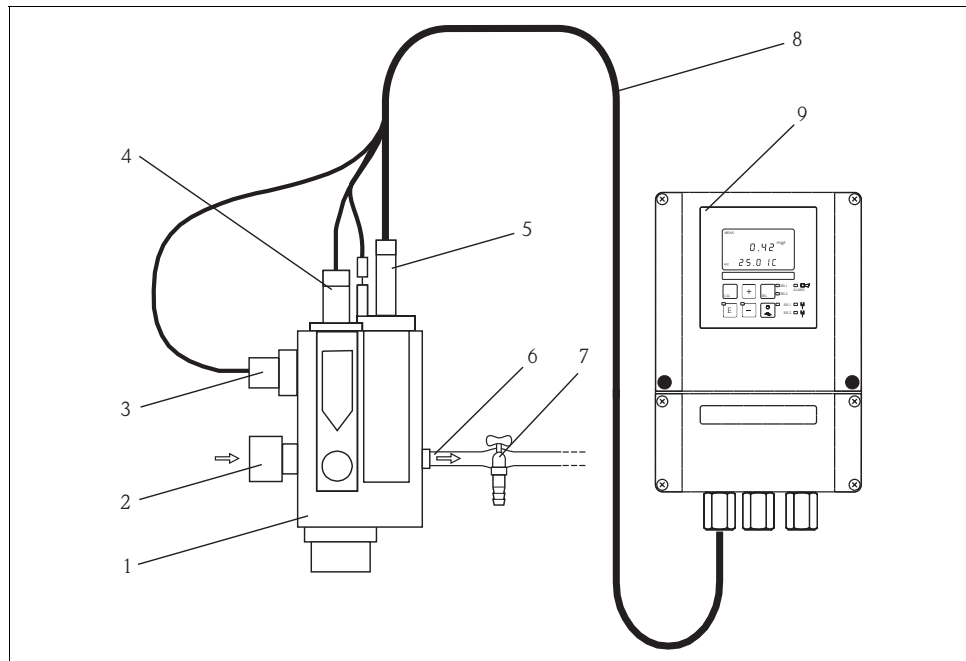

Measuring system in the flow mode (example)


20001691

- | | | | |
|---|--|---|----------------------------|
| 1 | Flow assembly CCA250 | 6 | Medium outlet |
| 2 | Medium inlet | 7 | Sampling tap |
| 3 | Inductive proximity switch for flow monitoring | 8 | Measuring cable CPK9-N*A1B |
| 4 | Mounting place for pH/ORP sensor | 9 | Transmitter |
| 5 | Chlorine sensor CCS120 | | |

The described above measuring system is available as CCE-system (fully mounted on a board).

A complete measuring system for immersion consists of:

- Chlorine sensor
- Transmitter Liquisys M CCM223/253
- Special measuring cable
- Immersion assembly

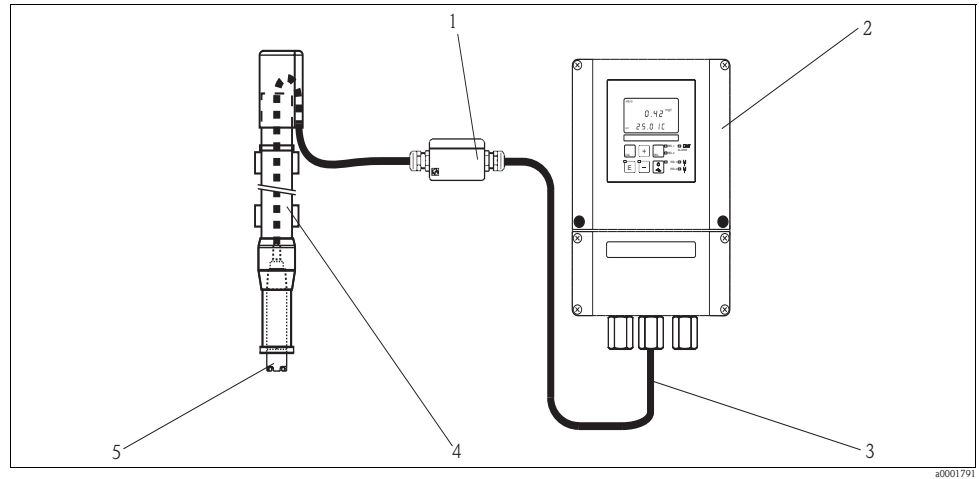

Measuring system in the immersion mode (example)

- | | | | |
|---|-----------------------|---|------------------------------|
| 1 | Junction box VBM | 4 | Immersion assembly CYA611-0B |
| 2 | Transmitter | 5 | Chlorine sensor CCS120 |
| 3 | Measuring cable CYK71 | | |

Input

Measured variables	Total chlorine	Free chlorine Cl ₂ (dissolved), HOCl, OCl ⁻ Bound chlorine (chloramines) Organic bound chlorine (e.g. cyanuric acid derivatives)
Measuring range	0.1 to 10 ppm (mg/l)	
Standard slope	110 to 120 nA (ppm)	

Output

Output signal	0 to 5 µA for connection to transmitter Liquisys M CCM223/253 with software version 2.32 or later
----------------------	---

Power supply

Power supply	15 V DC, 10 mA
---------------------	----------------

Performance characteristics

Response time	T ₉₀ approx. 60 s (as concentration rises and falls)	
Resolution	0.01 ppm (mg/l)	
pH range	5.5 to 9.5 pH dependency: jump from pH 7 to pH 8: approx. -10 % for free chlorine	
Conductivity range	0.03 to 40 mS/cm	
Temperature range	41 to 113°F (5 to 45°C), rapid changes in temperature are not allowed	
Pressure	Medium in the assembly CCA250: max. 14.5 psi (1 bar)	
Flow	optimum:	10.56 to 15.84 US.gal/h (40 to 60 l/h)
	minimum:	7.92 US.gal/h (30 l/h)
	maximum:	26.40 US.gal/h (100 l/h)
Minimum input flow velocity	optimum:	0.7 to 1.0 ft/s (20 to 30 cm/s)
	minimum:	0.5 ft/s (15 cm/s)
	maximum:	1.6 ft/s (50 cm/s)
Cross sensitivity	Oxidizing reagents e.g. bromine, iodine, ozone, chlorine dioxide, permanganates result in false positive results. Reducing reagents like sulphides, sulphites, tiosulphates, and hydrazine result in false negative results.	
Service life membrane cap	Typically 3 to 6 months, depending on water quality	

Installation


Installation conditions	The minimum flow may not drop below 7.92 US.gal/h (30 l/h). The minimum input flow velocity may not drop below 0.5 ft/s (15 cm/s).
--------------------------------	---

Environment

Storage temperature	Filled with electrolyte: 41 to 122°F (5 to 50°C) Without electrolyte: -4 to +140°F (-20 to +60°C)
Ingress protection	NEMA 6 (IP 68)

Mechanical construction

Design, dimensions

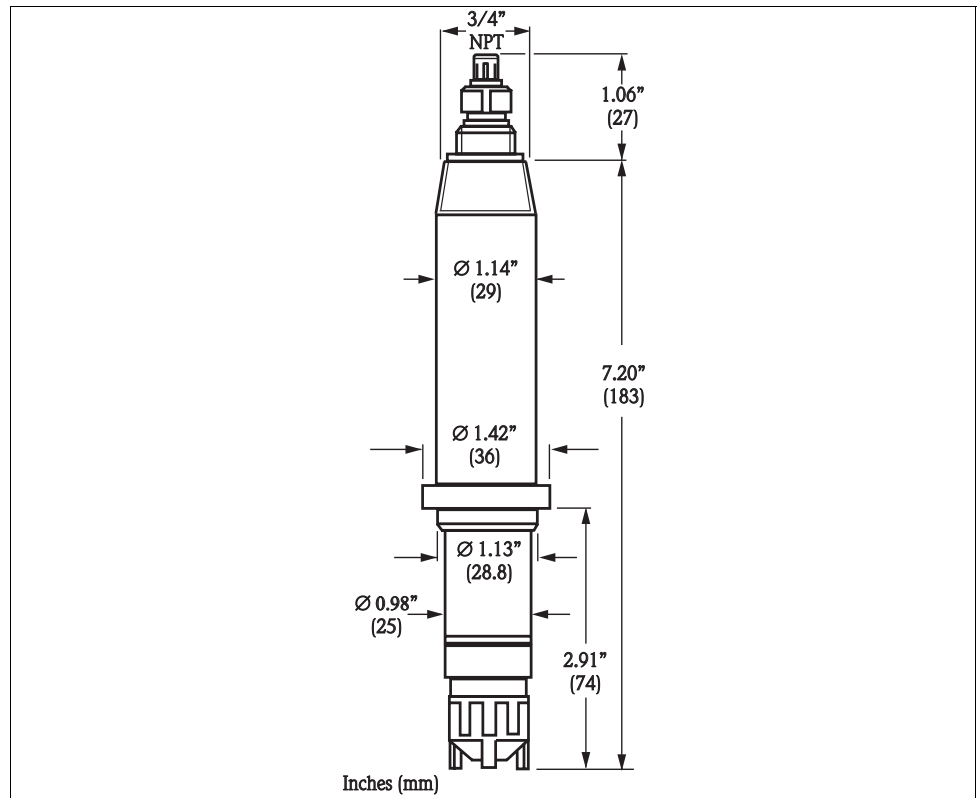

Dimensions

a0001690-en

Weight	approx. 0.3 lb. (0.14 kg)	
Material	Electrode shaft	PVC
	Membrane cap	PPE
Temperature sensor	NTC 10 k Ω at 77°F (25°C)	
Plug-in head	TOP68 plug-in head	
Cable length	max. 50 ft (15 m)	

Ordering information

Sensor CCS120

		Mesuring range	
A		0.1 to 10 ppm (mg/l)	
		Head type	
S		Thread NPT 3/4"; plug TOP 68	
		Options	
0		none	
CCS120-		complete order code	

CCE system

The CCE compact chlorine system is a factory-assembled and wired panel for transmitter with flow assembly CCA250-A1. It consists of four modules:

Module	Order no.
Sensor CCS120	CCS120 - x x x
CCE-1 board	50041731
Measuring cable for CCE1	51517204
Liquisys M (of your choice)	CCM253..... (see Technical Information TI 214C/24/ae)

In North America, the four modules are available as a complete package (115 V, CSA).
Order no. 51517437

Accessories

Connection accessories

- Junction box VBM
for cable extension, with 10 terminals, NEMA 4X (IP 65)
- Cable entry Pg 13.5 Order no. 50003987
Cable entry NPT 1/2" Order no. 51500177
- Measuring cable CCS120-1M, cable length: 3.28 ft (1 m), for compact chlorine system CCE1
order no. 51517204
- Special measuring cable CPK9-N*A1B internal PM wire
For sensors with TOP68 plug-in head, for high-temperature and high-pressure applications, IP 68
Ordering acc. to product structure, see Technical Information (TI 118C/07/en)

Installation accessories

- Flow assembly CCA250
for chlorine, chlorine dioxide, pH and orp;
(Technical Information TI062C/24/ae)
- Immersion assembly Dipfit W CYA611-0B
for sensor immersion in basins, open channels and tanks, PVC;
Ordering acc. to product structure (Technical Information TI 166C/24/ae)
- Compact chlorine system CCE1
Factory-assembled and wired panel for transmitter with flow assembly CCA250-A1; see also Technical Information TI 014C/07/en

Transmitter

- Liquisys M CCM223/53
Transmitter for chlorine, field or panel-mounted housing,
Hart® or PROFIBUS available,
Ordering acc. to product structure, see Technical Information (TI 214C/24/ae)

- Maintenance/calibration**
- Photometer CCM182; microprocessor controlled photometer for chlorine, pH value, cyanuric acid;
Chlorine measuring range: 0.05 - 6 ppm (mg/l)
pH measuring range: 6.5 - 8.4
 - Electrolyte for CCS120, 50 ml
order no. 51516343
 - Service kit for CCS120, consists of 2 membrane caps and 1 bottle electrolyte (50 ml)
order no. 51517284

Documentation

- Transmitters**
- Liquisys M CCM223/253, Technical Information TI 214C/24/ae

- Compact system**
- Compact chlorine system CCE1, Technical Information TI 014C/07/en

- Measuring cables**
- CPK1-12, Technical Information TI 118C/07/en

- Assemblies**
- Flow assembly CCA250, Technical Information TI 062C/24/ae
 - Immersion assembly CYA611, Technical Information TI 166C/24/ae

United States

Endress+Hauser, Inc.
2350 Endress Place
Greenwood, IN 46143
Tel. 317-535-7138
Sales 888-ENDRESS
Service 800-642-8737
fax 317-535-8498
inquiry@us.endress.com
www.us.endress.com

Canada

Endress+Hauser Canada
1075 Sutton Drive
Burlington, ON L7L 5Z8
Tel. 905-681-9292
800-668-3199
Fax 905-681-9444
www.ca.endress.com

Mexico

Endress+Hauser
Paseo del Pedregal No. 610
Col. Jardines del Pedregal
01900, Mexico D.F.
MEXICO
Tel. 525-568-2405
Fax. 525-568-7459