

# MAINTENANCE Paint & Supplies

## Primers/Rust Reformer & Converter

### KILZ® Original Low VOC Primer

- Interior oil-based primer
- Blocks stains and odors

KILZ primer blocks out most stains and odors, including water, smoke, ink and grease. Use it on brick, drywall, painted metal, masonry, plaster and wood. It dries to the touch in about 30 minutes and is ready for a second coat (if stains bleed through) or a topcoat in one hour.

Surface must be free of dust, grease, peeling paint, mold and mildew. If cleaning is necessary, use a non-soapy detergent, rinse well and allow to dry. Sold in 1-gallon containers. One gallon covers approximately 300 to 400 square feet. Low VOC, low odor.




DESCRIPTION	STOCK #	EACH
KILZ Original Low VOC Primer, 1 Gallon	92678	\$

### Zinsser® Mold Killing Primer

- EPA registered
- For interior and exterior use

Paint over all existing mold, mildew, moss, fungi and odor-causing bacteria with this water-based fungicidal protective coating. Mold killing primer contains an EPA-registered antimicrobial that prevents the growth of mold, mildew and other fungal organisms on the paint film. It dries to the touch in 30 minutes and is ready for re-coat in one hour. One gallon covers approximately 400 to 450 sq ft. **Note:** For water stains, you may also need to use a stain blocking primer.

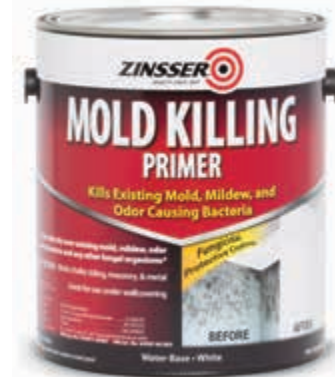

DESCRIPTION	STOCK #	EACH
Zinsser Mold Killing Primer, 1 Gallon	92676	\$
Zinsser Mold Killing Primer, 5 Gallons	92677	

## RUST-OLEUM® INDUSTRIAL BRANDS

### Rust-Oleum® Rust Reformer®

- Provides single-coat corrosion protection of steel surfaces in moderate environments
- Chemically transforms existing rust into a protective coating

Rust Reformer is a water-based vinyl acrylic copolymer coating designed specifically to transform rust into an inert black substance. Can be applied by brush, roller or spray to slightly damp surfaces. If using a water-based top coat, we recommend first using a solvent-based primer after applying Rust Reformer. Sold in 1-gallon containers only.



DESCRIPTION	STOCK #	EACH
Rust Reformer, 1 Gallon	42514	\$

## RUST-OLEUM® INDUSTRIAL BRANDS



### Rust-Oleum® High-Performance Coal Tar Epoxy

- Ideal for corrosive environments
- Economical, heavy-duty performance

Ideal for wastewater treatment facilities, this self-priming two-component system is specifically designed for use in severe environments. It can be used on concrete or steel structures, and on steel surfaces that are exposed to extremely corrosive environments. Not for use in potable water tanks. Meets U.S. Army Corps of Engineers Specs. C-200, C-200A; Steel Tank Institute Corrosion Control System STI-P3; American Water Works Association Spec. C-210-84. Available in flat black color only. **Cannot be sold in the South Coast Air Quality Management District.**

**Note:** This is a two-part system that requires purchase of base component and activator unit.

**Shipping:** Quantities of 3+ of the 5-gal size ship motor freight. Hazmat fees apply.

DESCRIPTION	SIZE	STOCK #	EACH
Base Component for 5-Gal Mixture	5 Gallon	42521	\$
Activator Unit for 5-Gal Mixture	1 Gallon	42522	
Base Component for 1.25-Gal Mixture	1 Gallon	42523	
Activator Unit for 1.25-Gal Mixture	1 Quart	42524	

## USABlueBook® BRAND PRODUCTS

YOUR BEST VALUE!

### USABlueBook Rust Converter

- Halts existing rust and prevents future corrosion
- Use as base coat for solvent-based paints

Neutralizes rust and deposits a durable polymeric barrier coating that resists rain, sun, salt and chemicals. Excellent base coat. Water-based formula. One gallon covers 500 sq ft. Use only solvent-based paint with this product.

DESCRIPTION	STOCK #	EACH	QTY 4+
1 Gallon	48226	\$	\$

