

PUMPS & PROCESS EQUIPMENT Submersible Sewage



Goulds 2DV Series Sewage Pumps

- Silicon carbide seal
- All 304 SS construction
- Vortex impeller

Goulds 2DV series pumps have proven to be some of the most reliable pumps in their field. With silicon carbide seals and all-stainless construction, these units are built to last. The vortex impeller reduces clogging and maintenance. Choose from 1- or 3-phase motors.



EBARA DWXU Dominator All Stainless Steel Sewage Pumps



- Stainless steel is lightweight, strong and corrosion-resistant
- Continuous-duty rated motors



Ebara Dominator stainless steel submersible sewage pumps offer high performance in a lightweight rugged package. With highest quality construction throughout, this pump will deliver years of trouble-free operation. Pumps listed below feature a non-clog vortex impeller. Choose from 1- and 3-phase models up to 3 hp.

Note: For automatic operation on single phase models, order optional float switch listed.



Pump type:	submersible sewage ejector
Solids handling:	2" spherical max
Construction:	304 SS housing, volute, impeller, shaft and fittings, Buna-N elastomers
Impeller:	vortex
Bearings:	upper and lower single-row ball, oil lubricated
Seal:	single mechanical, silicon/carbide, Buna-N elastomers
Motor:	air-filled, 3450 rpm; oil-filled, 3450 rpm (1- and 3-phase); capacitor start and thermal overload protection on 1-phase only
Max liquid temp:	104°F
Discharge:	2" NPT(F)
Cord:	20'L with molded plug (1-phase); bare leads (3-phase)

Pump type:	submersible sewage ejector
Solids handling:	2" spherical max
Construction:	304 SS housing, volute, impeller, shaft and fittings
Impeller:	vortex
Bearings:	upper and lower pre-lubricated
Seals:	double mechanical-carbon/ceramic (upper) silicon carbide/silicon carbide (lower)
Motor:	air filled, 3450 rpm, capacitor start (1- and 3-phase); built-in thermal overload on 1-phase
Max liquid temp:	104°F
Discharge:	2" NPT(F) horizontal
Cord:	20'L

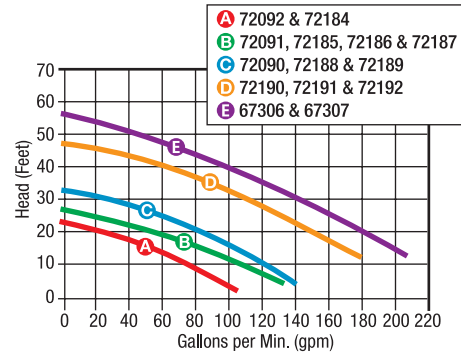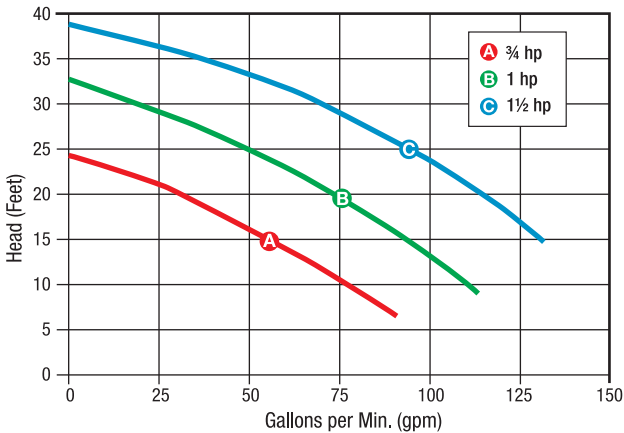

MODEL	HP	VOLTS*	PH	AMPS	WT (LBS)	STOCK #	EACH
2DV51D1VA	3/4	230	1	5.4	30	67839	\$
2DV51E1VA	1	230	1	7	34	67840	
2DV51E3VA	1	230	3	4.4	30	67841	
2DV51E4VA	1	460	3	2.2	30	67842	
2DV51F3VA	1 1/2	230	3	5.6	32	67843	
2DV51F4VA	1 1/2	460	3	2.8	32	67844	

* Alternate voltages available. Contact USABlueBook for more information.

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.

MODEL	HP	VOLTS* @ 60 HZ	PHASE	AMPS	STOCK #	EACH
50DWXU6.4S	1/2	115	1	8.3	72092	\$
50DWXU6.4S2	1/2	230	1	4.4	72184	
50DWXU6.75S	1	115	1	11.8	72091	
50DWXU6.75S2	1	230	1	6.4	72185	
50DWXU6.752	1	230	3	4.2	72186	
50DWXU6.754	1	460	3	1.99	72187	
50DWXU6.11S2	1 1/2	230	1	7.0	72090	
50DWXU6.112	1 1/2	230	3	4.77	72188	
50DWXU6.114	1 1/2	460	3	2.34	72189	
50DWXU6.15S2	2	230	1	8.8	72190	
50DWXU6.152	2	230	3	7.4	72191	
50DWXU6.154	2	460	3	3.5	72192	
50DWXU6.22	3	230	3	7.5	67306	
50DWXU6.24	3	460	3	4.0	67307	
Pump Control Float Switch		115	1	—	29250	
Pump Control Float Switch		230	1	—	29254	

* Alternate voltages available. Contact USABlueBook for more information.