

## SULZER

### Sulzer ABS Robusta™ Sump Pumps

- Clog-proof design
- Unique hand/auto switch allows manual or automatic operation


Robusta series pumps are well suited for commercial or residential applications and will give a long service life. They feature a reinforced polypropylene housing and impeller, heavy-duty stainless steel shaft and capacitor start motors.



70955

**Solids handling:** 1"  
**Discharge:** 1½" NPT(F)  
**Volts:** 115 VAC\*  
**Construction:** polypropylene  
**Impeller:** polyamid  
**Bearings:** lubricated  
**Seals:** Buna-N  
**Motor:** 1-phase, dynamically balanced with SS shaft  
**Cord:** 19'L

\* Alternate voltages available. Contact USABlueBook for more information.

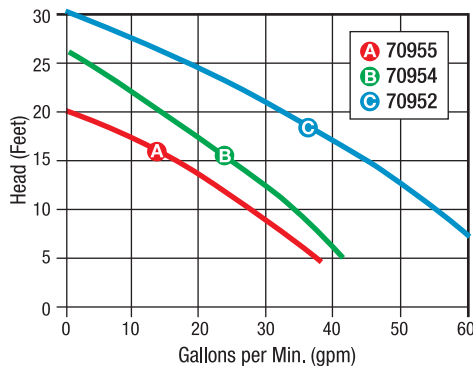

MODEL	HP	DIMENSIONS	WT (LBS)	STOCK #	EACH
100TS	¼	7.7"W x 12"H	7	70955	\$
200TS	⅓	7.7"W x 12"H	12.5	70954	
300TS	½	7.7"W x 12.6"H	13	70952	

Our skilled **in-house repair technicians** provide fast turnaround on both warranty and non-warranty repairs on a wide range of equipment.



### BJM "Mop-Up" Pumps

- Start pumping at very low levels
- Pumps down to 1/12 inch!
- Rubber-clad bottom protects surfaces


Use this pump to get rid of water right down to the surface of the floor—pump down to 1/12 of an inch! Rubber bottom protects floors. Unique non-return valve keeps water from flowing through the pump and back onto the floor. Quality construction includes a cast-iron pump end, and stainless steel shaft and motor housing. Thermal overload protection offers years of trouble-free operation.

**Includes:** 2" NPT(M) adapter.

**Note:** May require priming before initial startup in water levels lower than 3 inches.



**Discharge:** 1½" NPT(M)  
**hp:** ½  
**Volts:** 115 VAC  
**Dimensions:** 7.1"W x 14.6"H  
**Weight:** 26 lbs  
**Cord:** 33'L

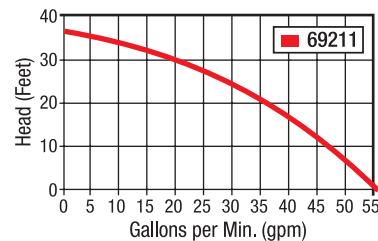

DESCRIPTION	STOCK #	EACH
BJM "Mop-Up" Submersible Dewatering Pump	69211	\$
Discharge Hose Kit, 1½", 50'L, with Cam-Lock Fitting	18206	

### We also RECOMMEND...

**NEW!**

### Discharge Hose Kits

Kits include a 50'L blue PVC discharge hose with quick-connect fittings (M x F) and your choice of adapter.

SIZE, ID	DISCHARGE	STOCK #	EACH
1½" (Female Adapter)	75 psi	18206	\$
1½" (Male Adapter)	75 psi	18207	
2" (Female Adapter)	75 psi	18208	
2" (Male Adapter)	75 psi	18209	