

Product SPOTLIGHT

High-quality performance at economical prices



Non-clogging Vortex-Type Impeller




Automatic Model

Zoeller® Sump Pumps

- Handles 1/2" solids
- Non-clogging vortex impellers
- Choose from manual or automatic models

Use these reliable professional-grade pumps in sump pits and for general water transfer applications. Choose from three series. **53 Series** pumps feature a cast-iron body and engineered plastic base and impeller; **57 and 98 Series** pumps feature durable all cast-iron construction.

Solids handling: 1/2"
Discharge: 1 1/2" NPT(F)
hp: 53 & 57 Series: 1/3 hp; 98 Series: 1/2 hp
Volts: 115 VAC
Full load amps: 53 & 57 Series: 9.7A; 98 Series: 9.4A

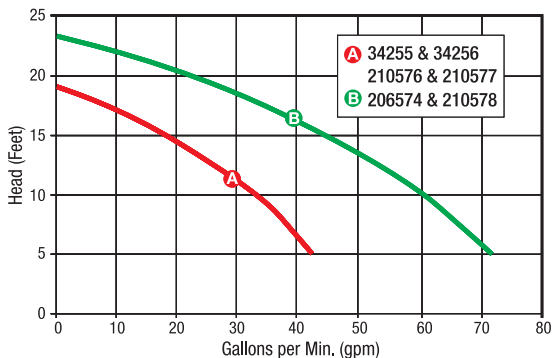

MODEL	TYPE	AUTO (ON)	AUTO (OFF)	CORD	STOCK #	EACH
53 SERIES PUMPS						
M53	Automatic	7 1/4"	3"	9'L	34255	\$
N53	Manual	—	—	15'L	34256	
57 SERIES PUMPS						
M57	Automatic	7 1/4"	3"	9'L	210576	\$
N57	Manual	—	—	15'L	210577	
98 SERIES PUMPS						
M98	Automatic	9 1/2"	3"	15'L	206574	\$
N98	Manual	—	—	15'L	210578	




Goulds GSP Sump Pumps

- Premium silicon carbide mechanical seal for added durability
- Cast iron body and oil-filled motor—rated for continuous operation



Goulds GSP sump pumps are compact and portable, but don't let their size fool you. These ultra-durable pumps feature a cast-iron body, corrosion-resistant fasteners, and a permanently lubricated motor for extended service life. Built-in vent hole in volute prevents air binding. 12" minimum sump diameter required.

Solids handling: 1/2"
Discharge: 1 1/2" NPT(F)
hp: 1/3
Volts: 115 VAC
Full load amps: 10



MODEL	TYPE	AUTO (ON)	AUTO (OFF)	CORD	STOCK #	EACH
GSP0311	Automatic	7 1/4"	3 1/2"	9'L	75662	\$
GSP0311-25	Automatic	7 1/4"	3 1/2"	25'L	75663	
GSP0311M	Manual	—	—	9'L	75664	

We also RECOMMEND...

High-Level Indoor/Outdoor Alarms

- For non-potable or wastewater applications
- Includes normally open float switch w/ 15'L cable
- Features audible horn and visible red beacon



Rated for use in indoor or outdoor, non-potable wastewater applications such as sump basins, holding tanks and lift stations. Alarm conditions set off a visible red beacon and an audible horn rated @ 85 dB. The alarm automatically resets, and it includes test and silence buttons. Standard auxiliary alarm SPDT contacts allow remote device hookup. External mounting feet are standard for quick installation to any flat, dry surface. NEMA 4X non-metallic enclosure is rated for indoor or outdoor use.

Includes: alarm unit, normally open (NO) float switch and manual.

Float switch: normally open, 15'L cord included
Alarm horn: 85 decibels @ 10 ft
Power: 120 VAC, 60 Hz
Dimensions: 5.5"W x 8.75"H x 4.6"D (including light)
Enclosure: NEMA 4X, indoor and outdoor rated



DESCRIPTION	STOCK #	EACH
High-Level Indoor/Outdoor Alarm Package	47979	\$