

BARNES®



45750



45751



Myers MS Series Sump Pumps

- Feature piggyback-style float switches for automatic or manual operation
- Corrosion-resistant zinc and cast-iron construction
- 3-year warranty


MS series pumps are ideal for basic light-duty dewatering. Their PSC-type oil-filled motors with thermal overload protection ensure years of trouble-free service. Piggyback-style switches allow operational flexibility and easy replacement if needed.



45749



Solids handling: 1/4"
Discharge: 1 1/2" NPT(F)
hp: 1/3
Volts: 115V
Full load amps: 3.9
Cord: 10'L

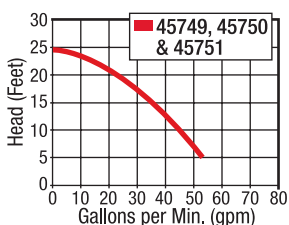

MODEL	SWITCH TYPE	AUTO (ON)	AUTO (OFF)	MINIMUM BASIN DIA	STOCK #	EACH
MS33T10	Tethered Wide Angle	14"	5"	14"	45749	\$
MS33V10	Vertical	7.5"	3"	10"	45751	
MS33D10	Diaphragm	9.5"	5"	10"	45750	


Barnes SP Sump/ Effluent Pumps

- Industry-compatible discharge— save time and money on replacement installations
- Choose from manual and automatic models
- 2-year warranty

Barnes SP pumps feature a heavy-duty cast-iron 10-vane vortex impeller with pump-out vanes. Choose from three types: manual, wide-angle mechanical float switch or vertical float switch. All pumps require a minimum pit diameter of 18".

Solids handling: 1/2"
Discharge: 1 1/2" NPT(F)
Volts: 115 VAC

MODEL	TYPE	HP	DIMENSIONS (W x H)	WT (LBS)	CORD LENGTH	STOCK #	EACH
SP33	Manual	1/3	8.52" x 11.76"	23.8	10'	38831	\$
SP33A	Auto (Mech. Float)	1/3	8.52" x 11.76"	25	10'	38832	
SP33VF	Auto (Vertical Float)	1/3	8.52" x 11.76"	25	10'	38833	
SP50X	Manual	1/2	8.52" x 11.76"	24.7	20'	38834	
SP50AX	Auto (Mech. Float)	1/2	8.52" x 11.76"	26.4	20'	38835	
SP50VFX	Auto (Vertical Float)	1/2	8.52" x 11.76"	25.8	20'	38836	
SP75X	Manual	3/4	8.52" x 12.26"	29	20'	38837	
SP75AX	Auto (Mech. Float)	3/4	8.52" x 12.26"	31	20'	38838	
SP75VFX	Auto (Vertical Float)	3/4	8.52" x 12.26"	31	20'	38839	

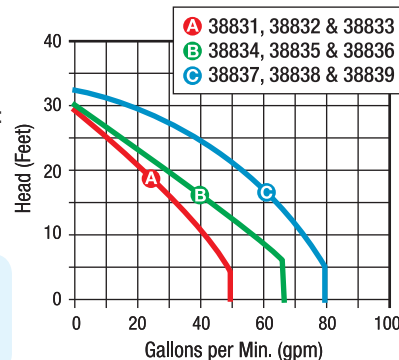

Little GIANT®

Little Giant® Heavy-Duty Sump Pumps


- Continuous-duty for extended use

Use these heavy-duty submersible pumps to move large volumes of clear water. They're ideal for many applications, including sump pits, excavation, crawl spaces, basements, underground passageways, grain elevators, construction sites, cooling towers, fire cleanup and more. Features include thermal overload protection, screened intake and polypropylene base.

Choose from epoxy-coated cast iron or rust-resistant bronze housings. Automatic models have a pressure switch for on/off operation. Minimum sump size: 18"Dia x 24"H.



MODEL	TYPE	HOUSING	HP	DIMENSIONS	WT (LBS)	STOCK #	EACH
6-CIM-R	Manual	Cast Iron	0.33	9.5"W x 7.25"H	16.5	66108	\$
8-CBM	Manual	Bronze	0.40	8.5"W x 6"H	21	66110	
8-CIM	Manual	Cast Iron	0.40	8.5"W x 6"H	18.8	66109	
6-CIA	Auto	Cast Iron	0.33	8.5"W x 6"H	17.75	66115	
8-CBA	Auto	Bronze	0.40	8.5"W x 6"H	21.3	66112	
8-CIA	Auto	Cast Iron	0.40	8.5"W x 6"H	19	66113	

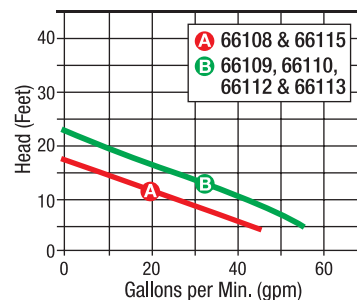

Discharge: 1 1/2" NPT(F)
Volts: 115 VAC*
Cord: 10'L

* Alternate voltages available.



66115