




Automatic
34251

Zoeller® “Flow Mate” Model 137 Submersible Effluent/Dewatering Pumps

- Handles 5/8" solids (sphere)
- 1 1/2" NPT(F) discharge


Pumps feature durable cast-iron construction, and no sheet metal parts to rust or corrode. The 60-cycle, 1725-rpm oil-filled motor is hermetically sealed. Choose from a manual model or an automatic model with a float-operated submersible (NEMA 6) 2-pole mechanical switch. On point is 9 3/4". Off point is 3". Pumps measure 11 3/4"W (at widest point) x 13"H. Weight is 47 lbs.

Pump type:	submersible effluent
Solids handling:	5/8" (spherical)
Construction:	cast-iron switch case, motor and pump housing, and base; stainless steel hardware
Impeller:	cast-iron vortex non-clog
Seal:	carbon and ceramic
Motor:	oil filled, thermal overload
Max liquid temp:	130°F
Discharge:	1 1/2" NPT(F)
Cord:	UL listed 3-wire neoprene; 10'L (automatic), 15'L (manual)

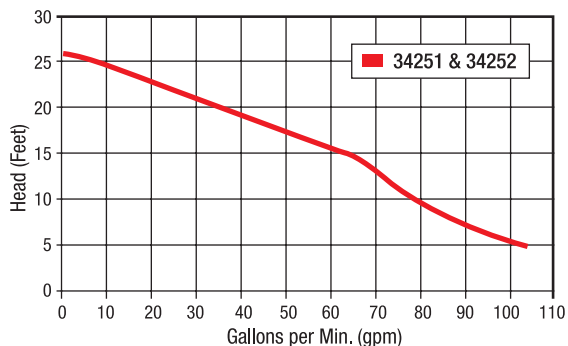

MODEL	OPERATION	HP	VOLTS*	AMPS	STOCK #	EACH
M137	Automatic	0.5	115	10.4	34251	\$
N137	Manual	0.5	115	10.4	34252	

* Alternate voltages available. Contact USABlueBook for more information.

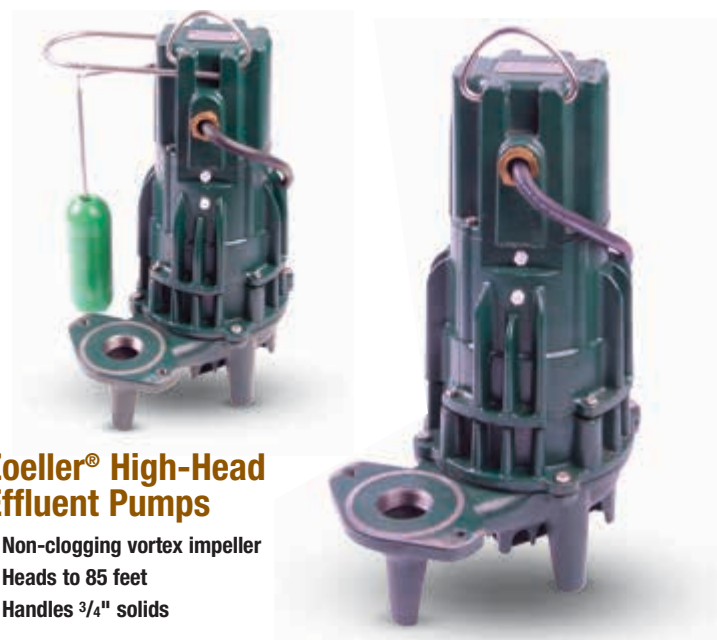

Zoeller® High-Head Effluent Pumps


- Non-clogging vortex impeller
- Heads to 85 feet
- Handles 3/4" solids

Zoeller high-head “Flow-Mate” pumps feature durable cast-iron construction with bronze vortex-style non-clog impellers. Ideal for effluent pumping where higher heads are required. Can be used with septic systems, low-pressure pipe (LPP) and enhanced flow step systems. Automatic and manual models available.

Shipping: Ships motor freight.



Pump type:	submersible effluent
Solids handling:	3/4"
Construction:	cast-iron body and volute, SS hardware
Impeller:	bronze vortex non-clog
Seal:	carbon/ceramic w/ Buna
Motor:	oil filled, thermal overload
Max liquid temp:	130°F
Discharge:	1 1/2" NPT(F) (optional 2" flange kit available)
Cord:	20'L

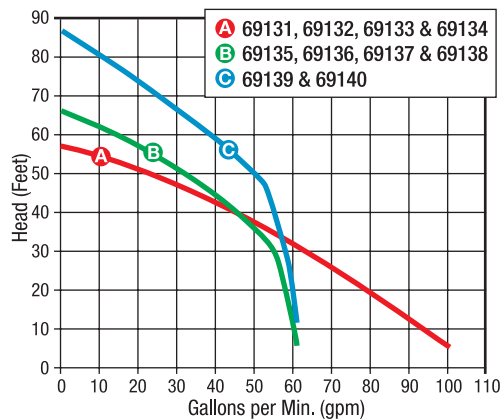

MODEL	HP	VOLTS**	PH	AMPS	WT (LBS)	STOCK #	EACH
M161	0.5	115	1	15.5	80	69131*	\$
N161	0.5	115	1	15.5	79	69132	
D161	0.5	230	1	7.5	80	69133*	
E161	0.5	230	1	7.5	79	69134	
M163	0.5	115	1	15	80	69135*	
N163	0.5	115	1	15	79	69136	
D163	0.5	230	1	7.5	80	69137*	
E163	0.5	230	1	7.5	80	69138	
D165	1	230	1	10.2	81	69139*	
E165	1	230	1	10.2	80	69140	

Optional 2" Discharge Flange Kit 58478

* Automatic unit. ** Alternate voltages available. Contact USABlueBook for details.