

## Gardner Denver Sutorbilt Legend Series Rotary Positive Displacement Blowers

Hundreds of blowers in stock for same-day shipping!



- Horizontal and vertical mount options available
- Replaces Sutorbilt B, F, L and P Series
- ISO 9001 certified

Sutorbilt's Legend Series blowers feature machined cast-iron construction of the housing and impellers. Impellers are dynamically balanced to operate without vibration and are permanently fastened to steel shafts. Shaft rotation can be in either direction. To change the inlet/discharge orientation of the blower, just reverse the rotation of the drive motor.

Anti-friction bearings are used throughout. Timing gears and gear end bearings are splash oil lubricated from an oil-tight housing enclosing the timing gears. Drive end bearings are grease lubricated through fittings. High temperature Viton® lip type seals prevent oil and grease from entering the impeller chamber to prevent contamination in your system. Gas pump blowers have special mechanical seals and other modifications for use in hazardous gas applications in sewage treatment plants.

**Includes:** Blowers featuring a \* include universal mounting feet for horizontal or vertical mounting. All other blowers include feet for horizontal mounting only. Vertical mounting feet are available free of charge by special request; contact us for details.

**Note:** 18-month factory warranty.

**Shipping:** Blowers over 70 lbs ship motor freight.




Standard Blower in Horizontal Position 67966

SIZE	DIAMETER INLET/OUTLET	SHAFT SIZE	WT (LBS)	STANDARD BLOWERS STOCK #	EACH	GAS PUMP BLOWERS STOCK #	EACH
<b>LOW PRESSURE MODELS</b>							
2LP/2LVP	2" NPT	0.625"	62	67966	\$	11031	\$
3LS/3LVS	2 1/2" NPT	0.750"	108	69931		300382	
3LS/3LVS	2 1/2" NPT	0.750"	108	67965*		11033*	
4LS/4LVS	3" NPT	0.875"	155	69932		11036	
4LS/4LVS	3" NPT	0.875"	155	67964*		11035*	
5LS/5LVS	4" NPT	1.125"	255	67963*		11037*	
6LS/6LVS	6" FLG	1.375"	505	67962*		11039*	
7LP/7LVP	8" FLG	1.562"	705	67961		11041	
8LP/8LVP	10" FLG	1.750"	1145	67960		11043	
<b>MEDIUM PRESSURE MODELS</b>							
2MP/2MVP	1" NPT	0.625"	55	48520	\$	11045	\$
3MS/3MVS	2" NPT	0.750"	88	69938		11048	
3MS/3MVS	2" NPT	0.750"	88	48522*		11047*	
4MS/4MVS	2 1/2" NPT	0.875"	125	48524*		11049*	
4M2/4MVS	2 1/2" NPT	0.875"	126	69939		11050	
5MS/5MVS	4" NPT	1.125"	215	48526*		11051*	
6MS/6MVS	5" NPT	1.375"	330	48521*		11053*	
7MP/7MVP	6" FLG	1.562"	600	48523		11055	
8MP/8MVP	8" FLG	1.750"	885	48525		11057	
<b>HIGH PRESSURE MODELS</b>							
3HS/3HVS	1 1/4" NPT	0.750"	82	69278	\$	11060	\$
3HS/3HVS	1 1/4" NPT	0.750"	82	69270*		11059*	
4HS/4HVS	1 1/2" NPT	0.875"	110	69279		11062	
4HS/4HVS	1 1/2" NPT	0.875"	110	69271*		11061*	
5HS/5HVS	2 1/2" NPT	1.125"	196	69272*		11063*	
6HS/6HVS	3" NPT	1.375"	305	69273*		11065*	
7HP/7HVP	4" NPT	1.562"	405	69274		11067	
8HP/8HVP	4" NPT	1.750"	708	69275		11069	

\* Blower includes universal mounting feet for horizontal or vertical mounting.

**operator notes**

Units need to be filled with oil before running to ensure long bearing life. Please refer to the blower manual for proper installation of sheaves. Running sheaves too far on the end of the shaft may void manufacturer warranty.

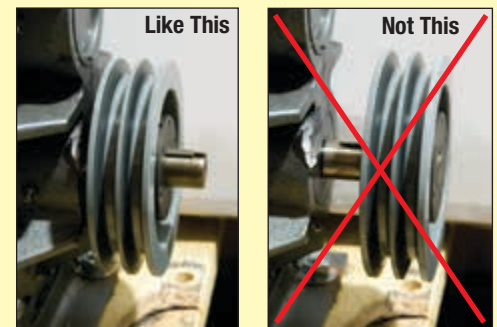

Proper Sheave Installation

### We also RECOMMEND...



88419

48534

48536

### Blower Oil & Grease

USABlueBook strongly recommends using the lubricant recommended by your blower manufacturer. Failure to do so can void your blower warranty.

DESCRIPTION	LUBRICANT TYPE	SIZE	AMBIENT TEMP RANGE	STOCK #	EACH
Aeon PD ISO 220	Oil	1 Quart	0 to 90°F	48536	\$
Aeon PD ISO 220	Oil	1 Gallon	0 to 90°F	88418	
Aeon PD ISO 220	Oil	5 Gallons	0 to 90°F	48538*	
Aeon PD-XD ISO 220	Oil	1 Quart	32 to 120°F+	88419	
Aeon PD-XD ISO 220	Oil	1 Gallon	32 to 120°F+	88420	
Aeon PD-XD ISO 220	Oil	5 Gallons	32 to 120°F+	88421*	
Aeon Lithium NLGI#2	Grease	14-oz Cartridge	—	48534	

\* Shipping: Additional handling fees apply.