

VALVES Backflow Preventers & Vacuum Breakers

Apollo® 4ALF Series RPZ Backflow Preventers


- No special tools needed for maintenance
- Modular check and relief valve assemblies

These backflow preventers feature ball valves. Choose from models with or without strainer.

Max working pressure: 175 psi
Max temperature: 180°F



Apollo 59LF Series Y-Strainer

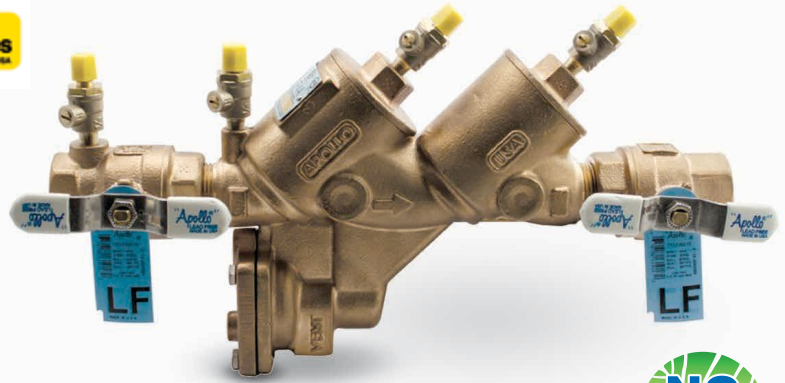

Backflow Preventer without Strainer 54915



Materials & Approvals:

Materials: lead-free bronze body, access covers, ball valves and test cocks; glass-filled PPO™ (similar to Noryl™) check valve cartridges; silicon seat discs; EPDM O-rings; 300-series SS fasteners, springs, and ball valve handles. **Approvals:** ASSE 1013, CSA B.64.4, IAPMO, USC-FCCCHR.

SIZE NPT(F)	MODELS WITH STRAINER				MODELS W/O STRAINER				STRAINERS		REPAIR KITS		AIR GAPS	
	OVERALL LENGTH*	WT (LBS)	STOCK #	EACH	OVERALL LENGTH*	WT (LBS)	STOCK #	EACH	STOCK #	EACH	STOCK #	EACH	STOCK #	EACH
3/4"	16 7/8"	9.9	51370	\$	12 5/8"	8.2	54915	\$	58875	\$	24542	\$	26144	\$
1"	19 3/8"	14.4	51371		14 5/8"	11.7	54916		58876		24542		26144	
1 1/4"	22 1/2"	17.0	51372		17 1/2"	13.6	54917		58877		24544		26145	
1 1/2"	23 3/4"	22.7	51373		18.0"	17.4	54918		58878		24544		26145	
2"	26 3/4"	31.7	51374		20 1/8"	24.5	54919		58879		24544		26146	

*Overall length includes ball valves.

Apollo® 4ALF & 4NALF-200 Series Stainless Steel RPZ Backflow Preventers

- Easy maintenance—no special tools required
- Check valve assemblies feature reversible silicone rubber seat discs

These backflow preventers feature NRS gate valves with or without N pattern. Strainers not included; FDA approved, epoxy-coated cast iron strainers are available separately below.

Shipping: Ships motor freight.

Materials & Approvals:

Materials: 304 SS body; glass-filled PPO/SS (2 1/2 to 6" models) or 304 SS (8" models) access covers; lead-free bronze relief valves; glass-filled PPO, lead-free bronze, 304 SS check valves; 304 SS springs and fasteners; chloramine-resistant silicone seat discs; lead-free bronze test cocks with 304 SS handles. **Approvals:** ASSE 1013, CSA B64.4, IAPMO, FM, NSF 372, AWWA C511 (2 1/2 to 6" 4ALF models only), USC-FCCCHR (all 2 1/2 to 6" models).

Max working pressure: 175 psi
Max temperature: 140°F



4ALF-200 Series w/ NRS Gate Valve 58850



SIZE (FLG)	BACKFLOW PREVENTERS				STRAINERS		REPAIR KITS		AIR GAPS	
	OVERALL LENGTH*	WT (LBS)	STOCK #	EACH	STOCK #	EACH	STOCK #	EACH	STOCK #	EACH
4ALF-200 SERIES WITH NRS GATE VALVES										
2 1/2"	31"	117	58850	\$	58870	\$	33593	\$	33591	\$
3"	32"	143	58851		58871		33593		33591	
4"	38"	197	58852		58872		33594		33591	
6"	45 7/8"	323	58853		58873		33595		33591	
8"	53 3/8"	691	58854		58874		33596		33592	
4NALF-200 SERIES (N-PATTERN) WITH NRS GATE VALVES										
2 1/2"	24 1/2"	125	58855	\$	58870	\$	33593	\$	33591	\$
3"	24 1/2"	150	58856		58871		33593		33591	
4"	27"	197	58857		58872		33594		33591	
6"	32"	322	58858		58873		33595		33591	
8"	40 3/4"	788	58859		58874		33596		33592	

*Overall length includes NRS valves. Nominal dimensions shown; tolerance per joint is ±1/8".



Strainer 58872

We also RECOMMEND...

Replacement Brass Test Cocks

CONNECTION NPT(M)	STOCK #	EACH	QTY 10+
1/8"	55008	\$	\$
1/4"	55009		



Brass test cocks work on ALL backflow preventers

