

**Zurn® Wilkins
950XL T2
Double Check
Backflow Preventers**



950XL T2 Backflow Preventer
(without strainer)

- Top access design for easy access during repair, maintenance and testing

Backflow preventers feature ball valves. Choose from models with or without strainer.

Materials, Standards & Approvals:

Materials: lead-free cast bronze body and access covers; Noryl™ seat rings and all internal polymers; silicon seat discs; Buna-N O-rings; 300-series SS fasteners, spring, and ball valve handles. **Standards:** ASSE listed No. 1015 (vertical flow-up: applies to 1 1/4" to 2"), IAPMO listed, CSA certified (vertical flow-up: applies to 1 1/2" and 2"), AWWA compliant C510, NSF listed 61-G. **Approvals:** USC-FCCCHR.

Max working pressure: 175 psi
Max temperature: 180°F



SIZE	MODELS WITH STRAINER				MODELS WITHOUT STRAINER				STRAINERS		REPAIR KITS	
	OVERALL LENGTH*	WT (LBS)	STOCK #	EACH	OVERALL LENGTH*	WT (LBS)	STOCK #	EACH	STOCK #	EACH	STOCK #	EACH
3/4" NPT(F)	17 7/8"	7	49333	\$	13"	6	15866	\$	38522	\$	10582	\$
1" NPT(F)	19 3/4"	13	49334		14"	12	15867		38523		10582	
1 1/4" NPT(F)	24 3/4"	24	49335		19 7/8"	22	15868		38524		10574	
1 1/2" NPT(F)	25 7/16"	25.4	49336		20 5/16"	22	15869		38525		10574	
2" NPT(F)	28 5/16"	34.6	49337		21 3/8"	29	15870		38526		10574	

* Overall length includes ball valves.

**Zurn® Wilkins
350XL & 375XL
Next Generation
Backflow Preventers**



350XLS Double Check Backflow Preventer



- Entire housing is removable for easy repair and cleaning
- Fast top access to test cocks and shut-off valves
- Designed to meet no-lead requirements


Choose from double-check or RPZ styles, available with or without strainer.

Max working pressure: 175 psi
Max temperature: 180°F



Materials, Standards & Approvals:

Materials: lead-free cast bronze body with reinforced nylon housing (series 350XL) or reinforced nylon housing (series 375XL); Delrin® and nylon internals; silicone seat discs; Buna-N O-rings; 300-series SS fasteners, springs and struts; lead-free cast bronze ball valves. **Series 350XL Standards & Approvals:** ASSE listed No. 1015, IAPMO listed, CSA certified B64.5, AWWA compliant C510, USC-FCCCHR approved, NSF listed 61 & 372. **Series 375XL Standards & Approvals:** ASSE listed No. 1013, IAPMO listed, CSA certified B64.4, AWWA compliant C511, USC-FCCCHR approved, NSF listed 61 & 372.

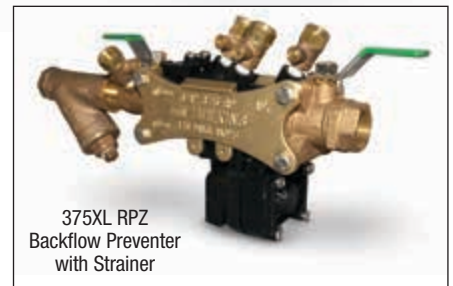

375XL RPZ Backflow Preventer with Strainer

SIZE	MODELS WITH STRAINER				MODELS WITHOUT STRAINER				STRAINERS		REPAIR KITS		AIR GAPS	
	OVERALL LENGTH*	WT (LBS)	STOCK #	EACH	OVERALL LENGTH*	WT (LBS)	STOCK #	EACH	STOCK #	EACH	STOCK #	EACH	STOCK #	EACH
SERIES 350XL DOUBLE CHECK ASSEMBLY WITH BALL VALVES														
3/4" NPT(F)	15 1/8"	5.6	55954	\$	11"	4.3	47145	\$	38522	\$	57001	\$	56999	\$
1" NPT(F)	17"	7.8	55944		12 1/4"	6.0	47146		38523		57002		56999	
1 1/4" NPT(F)	20 1/2"	21.8	55937		14 7/8"	19.0	47147		38524		57003		57000	
1 1/2" NPT(F)	22"	23.5	55932		15 1/4"	20.0	47148		38525		57003		57000	
2" NPT(F)	24"	28.0	55949		16"	22.0	47149		38526		57003		57000	
SERIES 375XL RPZ ASSEMBLY WITH BALL VALVES														
3/4" NPT(F)	12 5/8"	7.0	55955	\$	8 7/8"	5.7	73735	\$	38522	\$	56996	\$	56999	\$
1" NPT(F)	14 9/16"	11.5	55945		11 3/16"	9.7	73736		38523		56997		56999	
1 1/4" NPT(F)	20 1/2"	23.3	55938		14 7/8"	20.5	73737		38524		56998		57000	
1 1/2" NPT(F)	22"	25.0	55933		15 1/4"	21.5	73738		38525		56998		57000	
2" NPT(F)	24"	29.5	55950		16"	23.5	73739		38526		56998		57000	

* Overall length includes ball valves.