

# FLOW METERING Meter Brass



## Corporation Stops

- Designed for low-turning torques and high pressures (300 psi)

These corporation stops feature ball valves with AWWA standard (tapered/cc) thread. Ball valves still operate smoothly after being in the ground for years, vs. plug valves which eventually lock up in one position.

OUTLET TYPE	SIZE	MFR #	STOCK #	EACH
3/4" AWWA x McQuick CTS	3/4"	74701BQ-3/4	21037	\$
1" AWWA x McQuick CTS	1"	74701BQ-1	21038	
1 1/2" AWWA x McQuick CTS	1 1/2"	74701BQ-11/2	21039	
2" AWWA x McQuick CTS	2"	74701BQ-2	21040	
3/4" NPT x McQuick CTS	3/4"	74704BQ-3/4	21041	
1" NPT x McQuick CTS	1"	74704BQ-1	21042	
1 1/2" NPT x McQuick CTS	1 1/2"	74704BQ-11/2	21043	
2" NPT x McQuick CTS	2"	74704BQ-2	21044	
3/4" AWWA x Copper Flare	3/4"	74701B-3/4	21045	
1" AWWA x Copper Flare	1"	74701B-1	21046	
3/4" AWWA x Tube Compression	3/4"	74701BT-3/4	21047	
1" AWWA x Tube Compression	1"	74701BT-1	21048	
3/4" AWWA x Mac-Pak Tube Compression	3/4"	74701B-22	21049	
1" AWWA x Mac-Pak Tube Compression	1"	74701B-22	21050	
<b>FOR SCH 40 PE PIPE</b>				
3/4" AWWA x Mac-Pak TC Poly Pipe (Sch 40)	3/4"	74701B-33	21051	\$
1" AWWA x Mac-Pak TC Poly Pipe (Sch 40)	1"	74701B-33	21052	
<b>FOR SCH 40 PVC PIPE</b>				
3/4" AWWA x Mac-Pak TC PVC Pipe	3/4"	74701B-44	21053	\$
1" AWWA x Mac-Pak TC PVC Pipe	1"	74701B-44	21054	

Note: We sell insert stiffeners, which are recommended on all compression type flexible plastic connections. See below.

## Thermoplastic Insert Stiffeners

- Strong, precision-molded thermoplastic
- Engineered length and OD maximize connection rigidity

For use only with CTS-sized flexible plastic connections (polyethylene, PEX and polybutylene water service tubing).


SIZE	STOCK #	EACH
3/4"	31367	\$
1"	31368	



## Insert Stiffeners (McDonald Series 6133T & 6136)

Recommended on all flexible plastic connections. Stainless steel.

FOR POLYETHYLENE TUBING			FOR POLYETHYLENE PIPE (IPS)		
SIZE	STOCK #	EACH	STOCK #	EACH	
3/4"	48780	\$	48784		\$
1"	48782		48786		
1 1/4"	53045		53048		
1 1/2"	53046		53049		
2"	53047		53050		

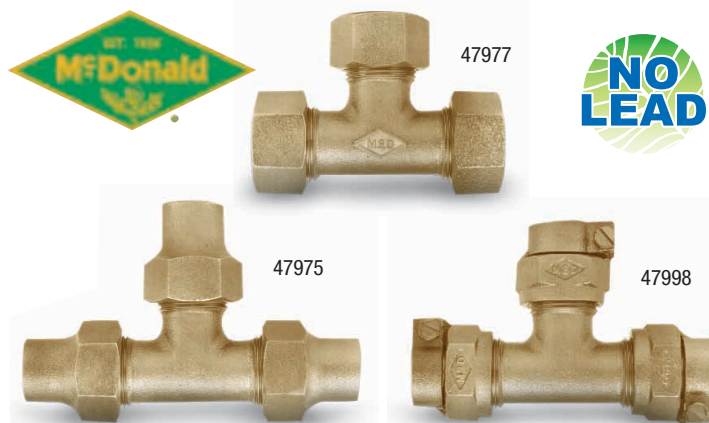

## Tees

CONNECTION TYPE	SIZE	MFR #	STOCK #	EACH
Copper Flare (3)	3/4"	74760	47975	\$
Copper Flare (3)	1"	74760	47976	
Tube Compression (3)	3/4"	74760T	47977	
Tube Compression (3)	1"	74760T	47997	
Mac-Pak Tube Compression (3)	3/4"	74760-22	47998	
Mac-Pak Tube Compression (3)	1"	74760-22	47999	

Note: We sell insert stiffeners, which are recommended on all compression type flexible plastic connections. See below left.



## Service Line Elbows

CONNECTION TYPE	SIZE	MFR #	STOCK #	EACH
<b>LEAD-FREE 90° ELBOWS</b>				
Copper Flare x Copper Flare	3/4"	74761	75596	\$
Copper Flare x Copper Flare	1"	74761	75597	
Tube Compression x Tube Compression	3/4"	74761T	75598	
Tube Compression x Tube Compression	1"	74761T	75599	
Mac-Pak Tube Compression	3/4"	74761-22	73089	
Mac-Pak Tube Compression	1"	74761-22	73090	
Mac-Pak TC x Male Iron Pipe	3/4"	74779M-22	73091	
Mac-Pak TC x Male Iron Pipe	1"	74779M-22	73092	
Copper Flare x Male Iron Pipe	3/4"	74779M	74907	
Copper Flare x Male Iron Pipe	1"	74779M	74908	
Tube Compression x Male Iron Pipe	3/4"	74779MT	74909	
Tube Compression x Male Iron Pipe	1"	74779MT	74910	
McQuick x Male Iron Pipe	3/4"	74779MQ	73093	
McQuick x Male Iron Pipe	1"	74779MQ	73094	
McQuick x Female Iron Pipe	3/4"	74779Q	73095	
McQuick x Female Iron Pipe	1"	74779Q	73096	

## NEW! LEAD-FREE 45° ELBOWS

Female Copper Flare Swivel x Copper Flare	3/4"	74750S	77768	\$
Female Copper Flare Swivel x Copper Flare	1"	74750S	77767	

Note: We sell insert stiffeners, which are recommended on all compression type flexible plastic connections. See at left.