


**Build your own blower package!**

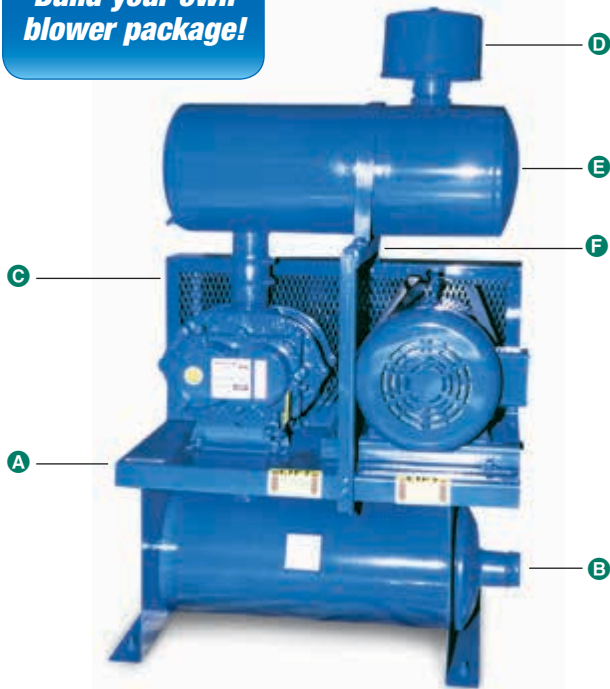

Package shown with blower and motor (sold separately)

## Blower Stand Packages and Silencers

- Accommodates Roots, Sutorbilt and M-D blowers
- Compact design

If you don't mind doing a certain amount of work, you can save money by assembling your own blower package. This also gives you the option of using a motor or blower that is already in your shop. We'll make it easy.

Our blower stand packages consist of the basic stand (A), a built-in discharge silencer (B) and the belt guard (C). Two flex connectors are also furnished with the base. We have specified premium built-in discharge silencers on our stock bases because they cover a wider range of frequencies than standard models and are best suited for today's higher blower speeds.

The belt guards accommodate virtually every size V-drive used by each blower/base combination. Cut out slots in the guard's wire grid to accommodate the blower and motor shafts.

Every blower should have a filter/silencer (D) for protection against dust. One paper filter element is included with each housing.

For maximum sound reduction, purchase an inlet silencer (E). The right angle in/out style pictured here requires a support arm (F), which is included with the silencer. The support arm has a vertical adjustment range of 10 to 13" (depending on the size) to accommodate different blower configurations.

**Note:** Pressure losses through blower silencers can run from 2 to 10" of H<sub>2</sub>O depending on the blower size and its operating cfm. Contact us with the basics of your operation, and we'll get you the equipment you need.

**Shipping:** Ships motor freight.



BLOWER INLET/OUTLET	BLOWER STAND PACKAGE A B C		FILTER/SILENCER D		INTAKE SILENCER/SUPPORT E F	
	STOCK #	EACH	STOCK #	EACH	STOCK #	EACH
2" Threaded	11201	\$	10620	\$	11210	\$
2 1/2" Threaded	11202		10630		11211	
3" Threaded	11203		10640		11212	
4" Threaded	11204		10650		11213	
5" Flanged	11205		10660		11214	
6" Flanged	11206		10680		11215	

## Product SPOTLIGHT

**Factory recommended by the major blower manufacturers**



## Blower Lubricants

- Offered for specific temperature ranges for maximum protection

USABlueBook strongly suggests using the lubricant recommended by your blower manufacturer. Failure to do so can void your blower warranty. We offer lubricants specifically recommended by individual blower manufacturers; recommended ambient temperature range is shown where applicable. **Note:** Shell Gadus™ grease may not be compatible with other greases.

**Shipping:** Additional handling fee applies to 5-gallon sizes.

DESCRIPTION	TYPE	SIZE	AMBIENT TEMP RANGE	STOCK #	EACH
<b>ROOTS BLOWERS</b>					
ISO 150	Oil	1 Quart	0 to 32°F	49141	\$
ISO 150	Oil	1 Gallon	0 to 32°F	75635	
ISO 150	Oil	5 Gallons	0 to 32°F	75636	
ISO 220	Oil	1 Quart	32 to 90°F	49071	
ISO 220	Oil	1 Gallon	32 to 90°F	49073	
ISO 220	Oil	5 Gallons	32 to 90°F	75637	
ISO 320	Oil	1 Quart	90°F+	49142	
ISO 320	Oil	1 Gallon	90°F+	75638	
ISO 320	Oil	5 Gallons	90°F+	75639	
Shell Gadus	Grease	14-oz Cartridge	—	49013*	
Synthetic Grease	Grease	14.1-oz Tube	—	74833**	
Synthetic Grease	Grease	5 Gallons	—	74839**	
<b>SUTORBILT BLOWERS</b>					
Aeon PD ISO 220	Oil	1 Quart	0 to 90°F	48536	\$
Aeon PD ISO 220	Oil	1 Gallon	0 to 90°F	88418	
Aeon PD ISO 220	Oil	5 Gallons	0 to 90°F	48538	
Aeon PD-XD ISO 220	Oil	1 Quart	32 to 120°F+	88419	
Aeon PD-XD ISO 220	Oil	1 Gallon	32 to 120°F+	88420	
Aeon PD-XD ISO 220	Oil	5 Gallons	32 to 120°F+	88421	
Aeon Lithium NLGI#2	Grease	14-oz Cartridge	—	48534	
<b>MD PNEUMATIC BLOWERS</b>					
PneuLube ISO 100	Oil	1 Quart	0 to 120°F	13258	\$
PneuLube ISO 100	Oil	1 Gallon	0 to 120°F	13259	
PneuLube Lithium NLGI#2	Grease	14-oz Cartridge	—	13289	

\* For use with Roots URAI blowers built before 8/1/16 and serial numbers up to but not including 1608A.

\*\* For use with Roots URAI blowers built on or after 8/1/16 and serial numbers beginning with 1608A and higher.