

Asphalt Patch

Product # 1801

Paving Patch Material

Asphalt Patch is a simple, durable solution for filling cracks, potholes and fault lines. This hardy sealant is made from a mix of flexible, yet resilient ingredients, including screened aggregate, tar and asphalt binders. It remains pliable within its container until it is applied to pavement surfaces, and remains loose enough for easy application at 15°F. Once it sets up, it keeps cracks sealed at all temperatures.

Use for Repairing:

- Concrete
- Asphalt
- Black Top
- Stone
- Brick Roads
- Parking Areas
- Playgrounds
- Driveways

Features and Benefits

- Can be used in any weather
- No primer coat is needed
- Can be used in temperatures as low as 15°F

Properties

Appearance:	Black liquid
Fragrance:	Petroleum odor
Specific Gravity:	1.01
Flash Point:	450°F
Stability:	2 years at 70°F

Directions *Complete directions on product label*

Clean area to be repaired of debris. Fill with Asphalt Patch to about 2" above top of surface. Tamp until packed firmly. Add additional amounts of Asphalt Patch to bring repaired area level to rest of surface.

Active Ingredients

CAS Number

Asphalt:	8052-42-4
Hydrogen Sulfide:	7783-06-4

Safety

Caution: Avoid breathing vapors. Keep out of the reach of children


DOT Shipping (Ground Transportation)

Proper Shipping Name:	None
Class:	None
ID Number:	None
Packing Group:	None

Quantities

5 gallon

NFPA RATINGS

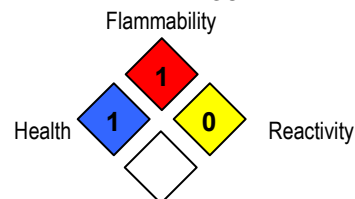

TOTAL
SOLUTIONS®

1801.062813

Milwaukee, WI 53224 | 1.800.743.6417 | Fax: 414.354.9219 | athea.com