

Ultra Spill Deck Bladder Systems®

Hidden Containment Bladder Automatically Unfurls To Capture Large Spills Or Drum Leaks



Ultra-Spill Deck Bladder Systems are low profile, polyethylene containment decks which meet EPA and Uniform Fire Code Spill Containment Regulations. Available in 1, 2 and 4-drum modules, the low 5 3/4" deck height allows safe and convenient drum loading, even without drum handling equipment. Add the optional polyethylene loading ramp for even greater handling ease.

Ultra-Spill Deck P1 Bladder System

U.S. Patent No. 5,642,834; 5,007,557
Canadian Patent No. 2,030,984



Part# 1320

Small spills and leaks are captured in the 11 gallon sump.



Large, catastrophic leaks flow into the bladder through a bulkhead fitting. Protective "trap door" opens automatically to allow bladder to unfurl.



Rugged, double layer polyethylene bladder allows 66 gallons total containment.

- Compact 25 7/8" x 30 1/2" footprint saves valuable floor space — perfect for single-drum waste collection usage.
- The first and only low profile, single-drum containment unit which meets SPCC, EPA Container Storage Regulation 40 CFR 264.175 and Uniform Fire Code Spill Containment Regulations.



Part# 2317

Polyethylene bladder is housed inside the Bladder Attachment. Connect the Bladder Attachment to the Spill Deck in seconds — no tools required!



Part# 2329

Ultra-Spill Deck P2 Bladder System

- Store 2 drums on the all-polyethylene, space-saving 25 7/8" x 52" Spill Deck P2 Bladder System.
- Low 5 3/4" deck height loaded onto Spill Deck Systems when standard drum handling equipment is not available.
- Applications include satellite waste collection, drum pump stations and storage of virgin chemicals.
- Meets SPCC, EPA Container Storage Regulation 40 CFR 264.175 and UFC Spill Containment Regulations.




Part# 2330

Ultra-Spill Deck P4 Bladder System

- Use the 4-drum Spill Deck Bladder System in place of taller containment pallets — low 5 3/4" deck height offers significant safety and handling benefits.
- Overspills and small leaks are captured in the 44-gallon sump; catastrophic leaks deploy the bladder, allowing the 4-drum system to meet regulations.
- Applications include satellite waste collection, drum dispensing, storage of virgin chemicals and hazardous wastes.
- **Meets SPCC, EPA Container Storage Regulation 40 CFR 264.175 and UFC Spill Containment Regulations.**

Example:

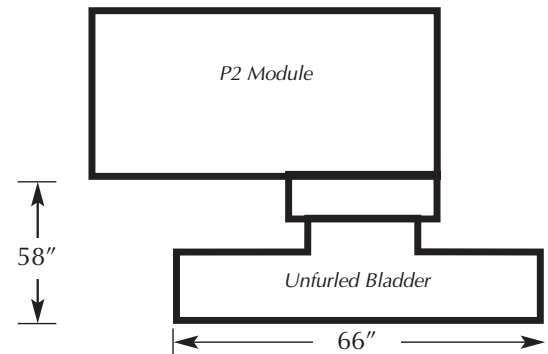

- Use optional bulkhead fittings to connect 1, 2 or 4-drum Spill Deck modules together. A virtually unlimited number of custom configurations can be designed to meet your specific needs.
- Spill Deck configurations which accommodate 6 or more 55-gallon drums do not require usage of the Bladder Attachment to meet SPCC, EPA and Uniform Fire Code Regulations. Any 6-drum configuration, when connected with optional bulkhead fittings, will have a 66-gallon sump capacity without a Bladder Attachment.
- Spill Deck Bladder Systems require adequate aisle space to allow the Bladder to unfurl properly.

ULTRA-SPILL DECK BLADDER SYSTEMS

Ultra-Spill Deck P1 Bladder System	Ultra-Spill Deck P2 Bladder System	Ultra-Spill Deck P4 Bladder System	
Part# 1320	Part# 2329	Part# 2330	
Dimensions: 25 7/8" x 30 1/2" x 5 3/4" (657 mm x 775 mm x 146 mm)	Dimensions: 52" x 30 1/2" x 5 3/4" (1321 mm x 775 mm x 146 mm)	Dimensions: 52" x 56 5/8" x 5 3/4" (1321 mm x 1438 mm x 146 mm)	
Weight: 27 lbs. (12 kg)	Weight: 44 lbs. (20 kg)	Weight: 66 lbs. (30 kg)	
Uniformly Distributed Load: 1,500 lbs. (681 kg)	Uniformly Distributed Load: 3,000 lbs. (1,361 kg)	Uniformly Distributed Load: 6,000 lbs. (2,722 kg)	
Containment Capacity: 66 gallons (250 L)	Containment Capacity: 77 gallons (291 L)	Containment Capacity: 99 gallons (375 L)	
Sump Capacity prior to spill entering bladder: 11 gallons (41 L)	Sump Capacity prior to spill entering bladder: 22 gallons (83 L)	Sump Capacity prior to spill entering bladder: 44 gallons (166 L)	
Bladder Attachment	Replacement Bladder	Bladder Pump	Loading Ramp
Part# 2317 (Includes bladder, bulkhead fitting)	Part# 6340 (Includes bulkhead fitting)	Part# 2345	Part# 1089
Dimensions: 25 1/8" x 4 5/8" x 4 5/8" (638 mm x 117 mm x 117 mm)	Dimensions (unfurled): 66" x 58" (1677 mm x 1474 mm)	Dimensions: 12" x 7" x 5 1/2" (305 mm x 178 mm x 140 mm)	Dimensions: 24" x 32" x 5 3/4" (610 mm x 813 mm x 146 mm)
	Containment Capacity: 55 gallons (208 L)		
Weight: 4 lbs. (2kg)	Material: Polyethylene Weight: 2 lbs. (1 kg)	Weight: 3 lbs. (1.5 kg)	Weight: 35 lbs. (16 kg)
Options: Spill Deck P1 Module, Part# 1321. Spill Deck P2 Module, Part# 1086. Spill Deck P4 Module, Part# 1072. Bulkhead Fitting, Part# 1073. 26" T-Strip, Part# 1131.			